
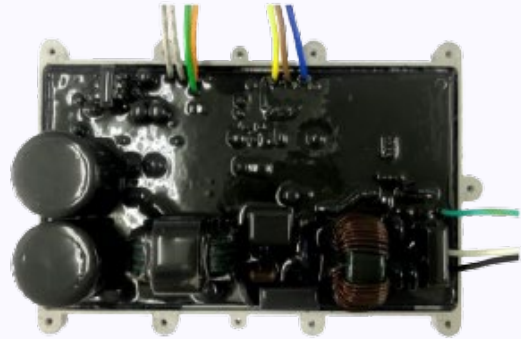


水車式增氧機控制系列 Waterwheel Aerators Controlling Series

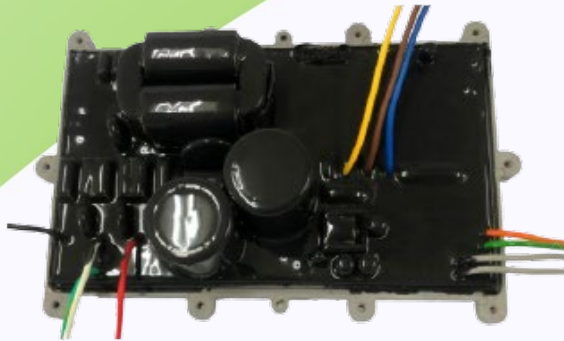

項目Item

規格 Specification

型號Module

WWL Series

輸出功率Output Power

750W (1HP)/1500W (2HP)

輸入電壓 Input Voltage

220V AC / 50-60Hz
220V AC/380V AC/440V AC (3Phase) 50-60Hz

轉速範圍 Speed Range

600~1750rpm

操作環境溫度 Environment Temperature

-10°C~45°C

操作環境濕度 Environment Humidity

5~85% RH

絕緣等級 Insulation Class

Class B/Class F



諧波值 Harmonic Value

<15%(I-THD)

電器保護 Electric Protection

過電壓/電流保護 Over Voltage/Current Protection
過溫度保護 Over Temperature Protection
過載保護 Over Load Protection
堵轉保護 Blocking Protection
失速保護 Stall Protection
反轉保護 Reversal Protection

上述規格為標準品，若有特殊需求請洽業務人員
Please contact sales for custom designed.

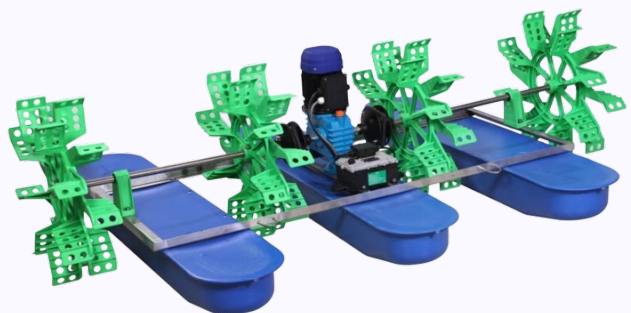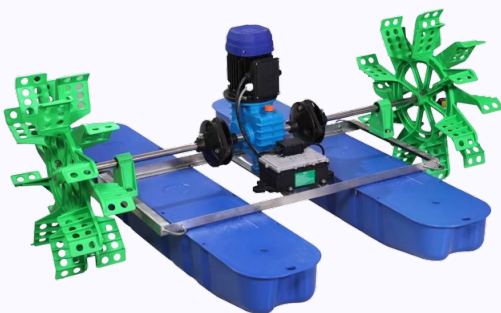

工廠水源廠 Headquarter
台中市豐原區水源路258巷15號3-5樓
3-5F., No. 15, Ln. 258, Shuiyuan Rd.,
Fengyuan Dist., Taichung City 420,
Taiwan (R.O.C.)
TEL: 04-25155231、04-25155229

中陽辦公室 Office
台中市豐原區中陽路517號
No. 517, Jhongyang Rd., Fengyuan Dist.,
Taichung City 420, Taiwan (R.O.C.)
TEL:+886-4-25155968
FAX:+886-4-25132508

